

Finora

Spec Guide

Issued January 2026



Finora

Color options for Body and Decoration Panel



Body	White	White	Black	Black
Panel	Chrome plating	White	Chrome plating	Black

Seat types



Mesh



Upholstered

Armrest types



Adjustable Armrest



Fixed Armrest



Without Armrest

[Options]

Adjustable Armrest

C7529A-G □ □ □

G721: Black, GB03: White

Fixed Armrest

C7524A-G □ □ □

G721: Black, GB03: White

Options



Adjustable Headrest



Adjustable Hanger



Lumbar Support

[Options]

Adjustable Headrest

C7502Z (Black body)

C7502X (White body)

-FBA□,FEA□,FGE□,FPE□,FPF□

Lumbar Support

C7519W-G728

G728: Clear gray

Adjustable Hanger

C7926W-G □ □ □

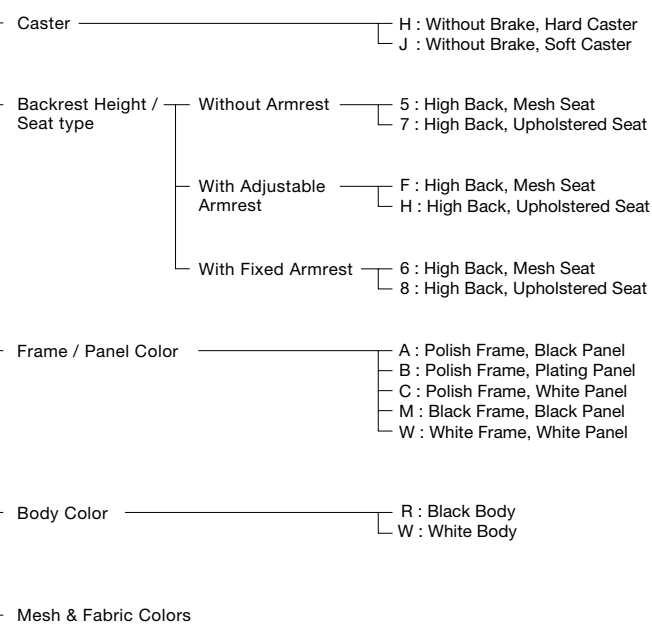
G721: Black, GB03: White

Product Code



C7 □ □ □ □ - **F** □ □ □


Finora



Color Variations


Mesh Back and Mesh Seat

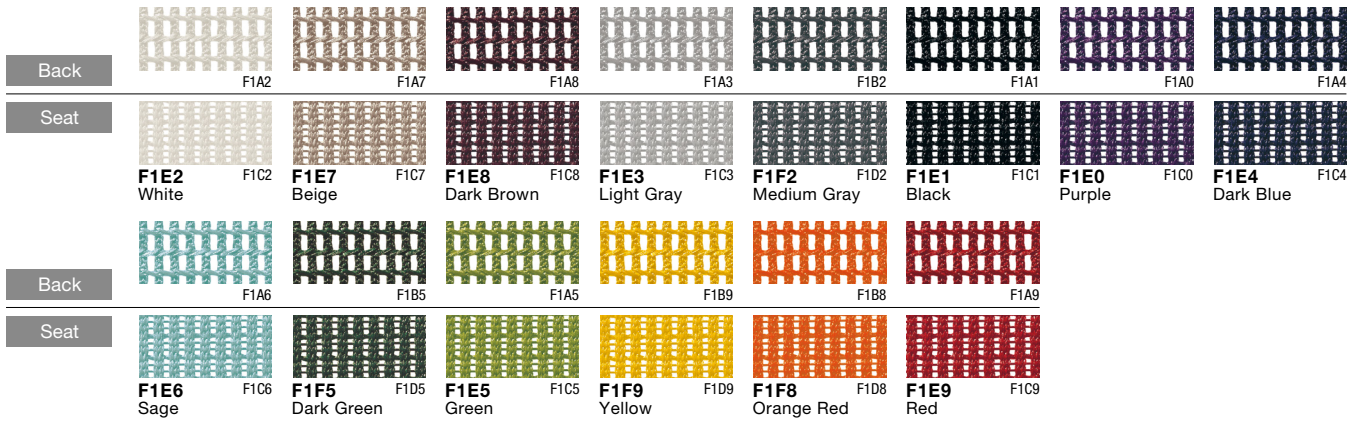F1□□




Mesh Back and Cushion Seat

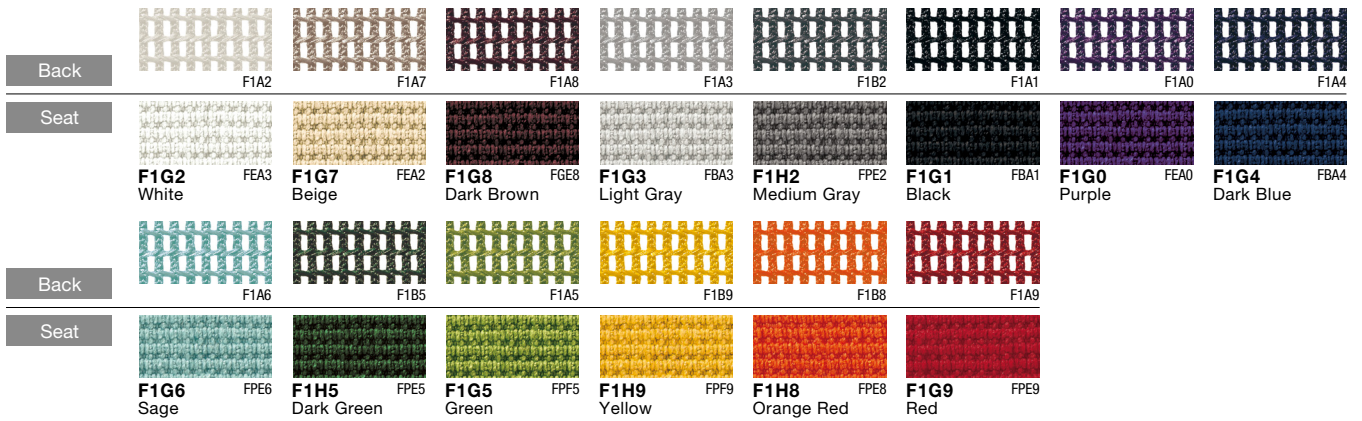F1□□











Adjustable Headrest

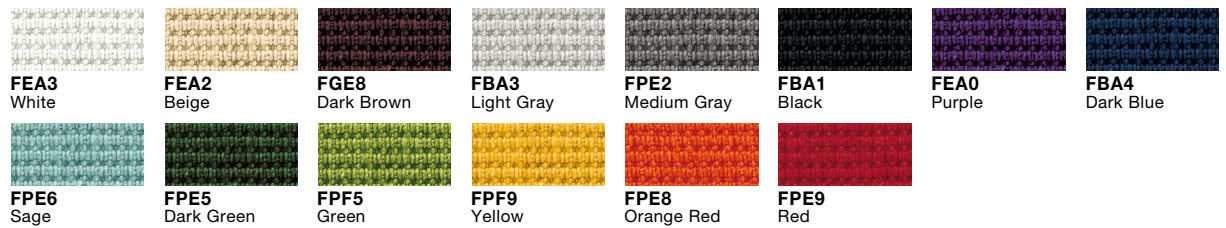F□□□



Dimensions

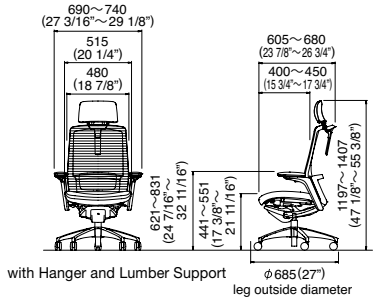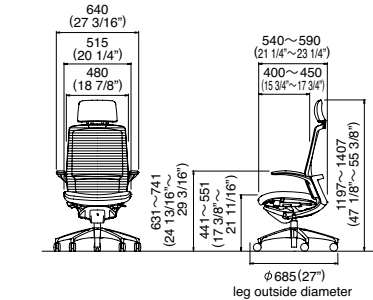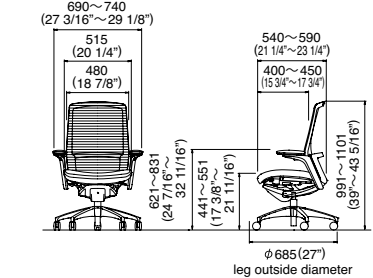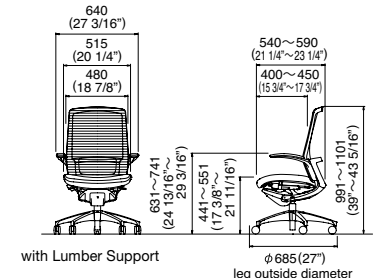Chair Type	Armrest Type	Mesh Seat	Upholstered Seat
High Back with Headrest	Adjustable Armrest	 <p>690~740 (27 3/16~29 1/8")</p> <p>515 (20 1/4")</p> <p>480 (18 7/8")</p> <p>400~450 (15 3/4~17 3/4")</p> <p>540~590 (21 1/4~23 1/4")</p> <p>400~450 (15 3/4~17 3/4")</p> <p>621~831 (24 7/16~32 11/16")</p> <p>441~551 (17 3/8~21 11/16")</p> <p>1197~1407 (47 1/8~55 3/8")</p> <p>φ 685 (27") leg outside diameter</p>	 <p>690~740 (27 3/16~29 1/8")</p> <p>515 (20 1/4")</p> <p>480 (18 7/8")</p> <p>400~450 (15 3/4~17 3/4")</p> <p>605~680 (23 7/8~26 3/4")</p> <p>400~450 (15 3/4~17 3/4")</p> <p>621~831 (24 7/16~32 11/16")</p> <p>441~551 (17 3/8~21 11/16")</p> <p>1197~1407 (47 1/8~55 3/8")</p> <p>φ 685 (27") leg outside diameter</p> <p>with Hanger and Lumber Support</p>
	Fixed Armrest	 <p>640 (27 3/16")</p> <p>515 (20 1/4")</p> <p>480 (18 7/8")</p> <p>400~450 (15 3/4~17 3/4")</p> <p>540~590 (21 1/4~23 1/4")</p> <p>400~450 (15 3/4~17 3/4")</p> <p>631~741 (24 13/16~29 3/16")</p> <p>441~551 (17 3/8~21 11/16")</p> <p>1197~1407 (47 1/8~55 3/8")</p> <p>φ 685 (27") leg outside diameter</p>	 <p>640 (27 3/16")</p> <p>515 (20 1/4")</p> <p>480 (18 7/8")</p> <p>400~450 (15 3/4~17 3/4")</p> <p>540~590 (21 1/4~23 1/4")</p> <p>400~450 (15 3/4~17 3/4")</p> <p>631~741 (24 13/16~29 3/16")</p> <p>441~551 (17 3/8~21 11/16")</p> <p>1197~1407 (47 1/8~55 3/8")</p> <p>φ 685 (27") leg outside diameter</p>
High Back	Adjustable Armrest	 <p>690~740 (27 3/16~29 1/8")</p> <p>515 (20 1/4")</p> <p>480 (18 7/8")</p> <p>400~450 (15 3/4~17 3/4")</p> <p>595~670 (23 3/8~26 3/8")</p> <p>400~450 (15 3/4~17 3/4")</p> <p>691~831 (24 7/16~32 11/16")</p> <p>441~551 (17 3/8~21 11/16")</p> <p>965~1185 (38~46 9/16")</p> <p>891~1101 (39~43 5/16")</p> <p>φ 685 (27") leg outside diameter</p> <p>with Hanger</p>	 <p>690~740 (27 3/16~29 1/8")</p> <p>515 (20 1/4")</p> <p>480 (18 7/8")</p> <p>400~450 (15 3/4~17 3/4")</p> <p>540~590 (21 1/4~23 1/4")</p> <p>400~450 (15 3/4~17 3/4")</p> <p>691~831 (24 7/16~32 11/16")</p> <p>441~551 (17 3/8~21 11/16")</p> <p>991~1101 (39~43 5/16")</p> <p>φ 685 (27") leg outside diameter</p>
	Fixed Armrest	 <p>640 (27 3/16")</p> <p>515 (20 1/4")</p> <p>480 (18 7/8")</p> <p>400~450 (15 3/4~17 3/4")</p> <p>540~590 (21 1/4~23 1/4")</p> <p>400~450 (15 3/4~17 3/4")</p> <p>631~741 (24 13/16~29 3/16")</p> <p>441~551 (17 3/8~21 11/16")</p> <p>991~1101 (39~43 5/16")</p> <p>φ 685 (27") leg outside diameter</p>	 <p>640 (27 3/16")</p> <p>515 (20 1/4")</p> <p>480 (18 7/8")</p> <p>400~450 (15 3/4~17 3/4")</p> <p>540~590 (21 1/4~23 1/4")</p> <p>400~450 (15 3/4~17 3/4")</p> <p>631~741 (24 13/16~29 3/16")</p> <p>441~551 (17 3/8~21 11/16")</p> <p>991~1101 (39~43 5/16")</p> <p>φ 685 (27") leg outside diameter</p> <p>with Lumber Support</p>

mm (inch)

OKamura

OKAMURA CORPORATION

International Sales & Marketing Div.

www.okamura.com

Please note that specifications, dimensions, and colors are subject to change without notice. The colors of the actual products may differ somewhat from the colors shown in the catalog, depending on printing conditions.